


1. PRESSURE SETTINGS: 175, 200, 225 AND 300 PSI
2. UL LISTED & FM APPROVED.
3. FLUSH: LIFT FLUSH TAB.
4. HYDROTEST: PRESS HYDRO TAB, INSERT 5/32" HEX KEY INTO OPENING.
5. MAY BE INSTALLED VERTICALLY OR HORIZONTALLY.
6. ROUNDED TO NEAREST 1/8" [1mm].




—OUTLET: 1/2" FEMALE NPT

—INLET: 1/2" MALE NPT

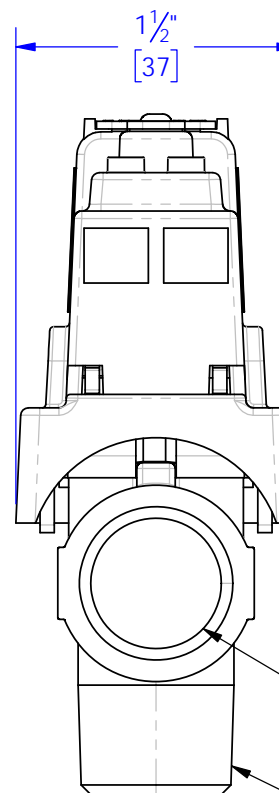

**AGF Manufacturing, Inc.**  
100 Quaker Lane  
Malvern, PA 19355  
Ph. 610-240-4900  
Fax 610-240-4906  
[www.agfmfg.com](http://www.agfmfg.com)

DIMENSIONS ARE IN INCHES & [mm]				TITLE  RELIEF VALVE, 1/2", LOCKING					
DRAWN	BFG	DATE	25FEB2022				SCALE	1:1	
APPR'D		DATE					WEIGHT	0.0 LBS.	
MATERIAL				VARIOUS	PROJECTION		SIZE	PART/DRAWING NO.	REV
PROJECT				REFERENCE DRAWING					
A		M7000L			1				